





HORIZONTALE TARWEMACHINE MET INGEBOUWDE TRIEUR

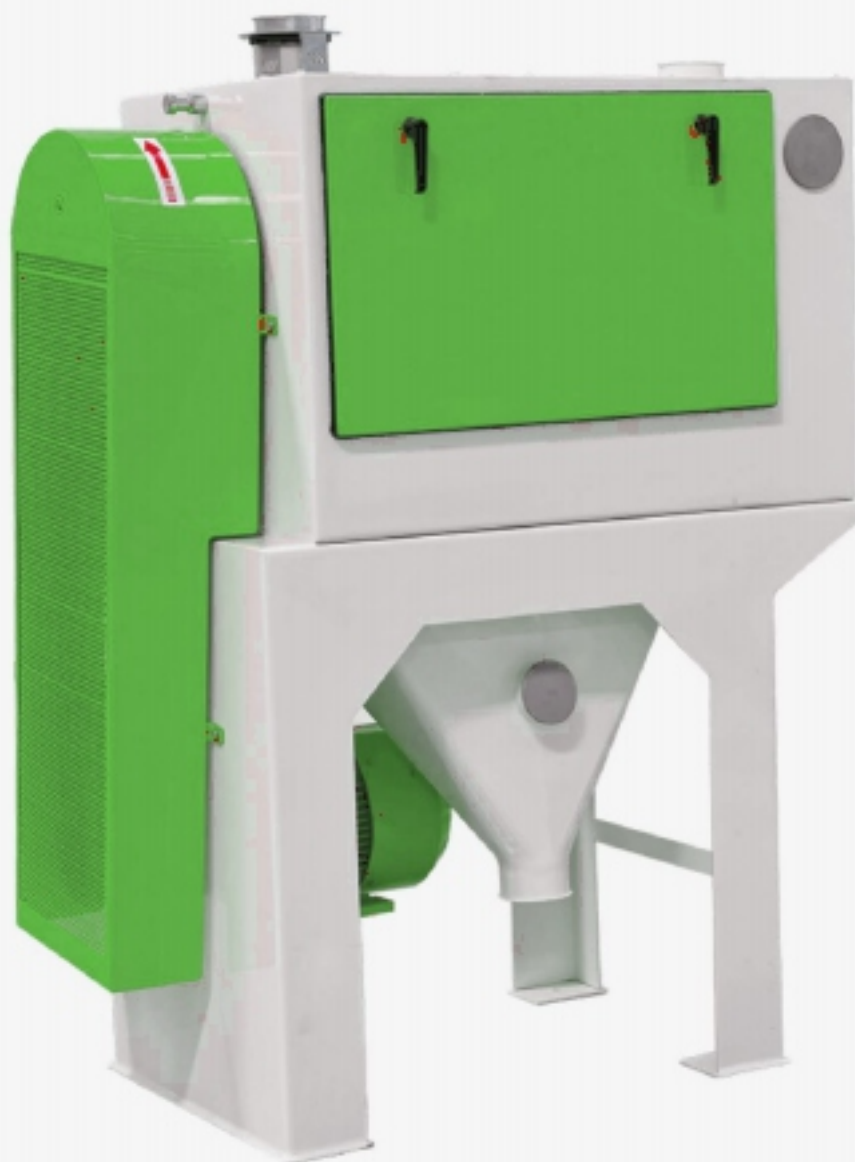

MHS 35x60 - Cap.: 5 tot 13 T/h
MHS 45x80 - Cap.: 15 - 16 T/h

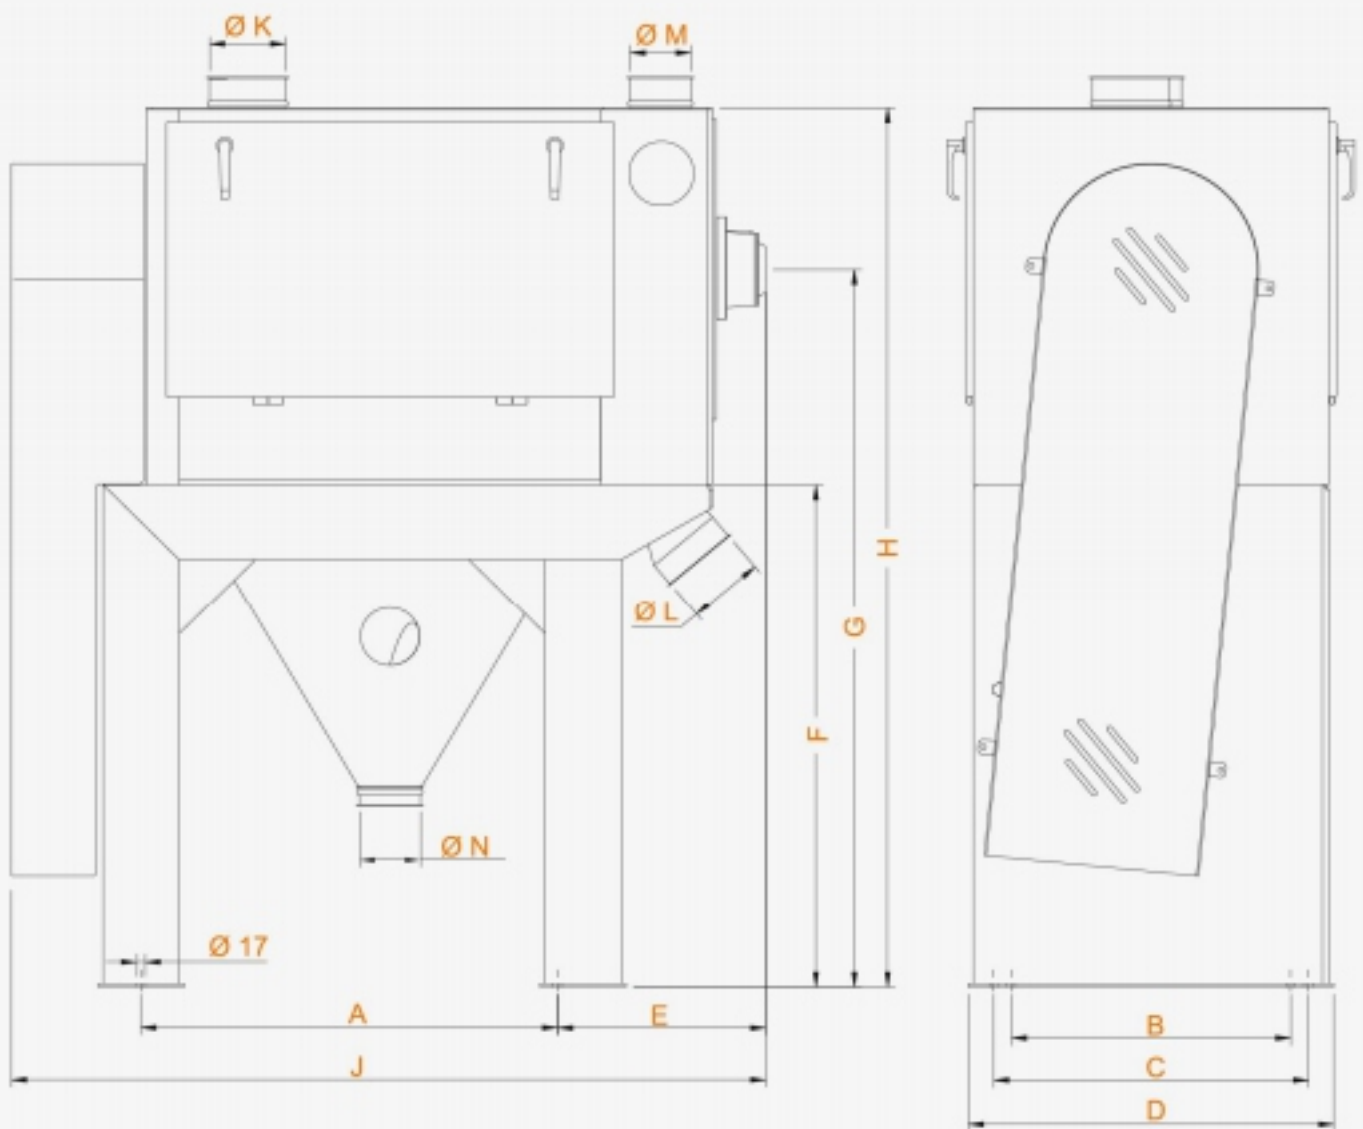

Afmetingen (mm)

Model	A	B	C	D	E	F	G	H	J	ØK	ØL	ØM	ØN
MHS 35x60	620	450	520	620	360	700	1130	1440	1285	150	150	120	120
MHS 45x80	820	550	620	720	360	1006	1436	1759	1485	150	150	120	120

Technische data

Model	Capaciteit (T/h)				Motor (kW)	Gewicht (kg)	Vereist Luchtdebiet (m ³ /min)
	Zachte tarwe		Harde tarwe				
	1 ^{ste} Reinig.	2 ^{de} Reinig.	1 ^{ste} Reinig.	2 ^{de} Reinig.			
MHS 35x60	6	5	6	5	5,5	500	60
	8	7	8	7	7,5		
MHS 45x80	14	13	13	12	11	1100	80
	16	15	15	15	15		