




TROGBANDEN

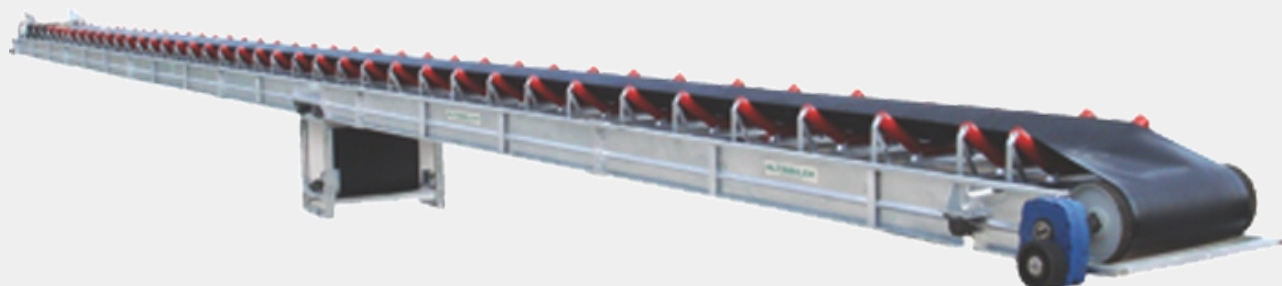

Bandbreedte: 400 tot 1200 mm
Capaciteit: 35 tot 1200 T/h
Bandsnelheid: 1,7 m/s

Afmetingen (mm) & Technische data

Capaciteit (T/h)	Bandsnelheid (m/s)	Bandbreedte B (mm)	2-delige trog: β (°)
35	1,7	400	15°
65	1,7	500	15°
120	1,7	650	15°
45	1,7	400	25°
75	1,7	500	25°
150	1,7	650	25°

Capaciteit (T/h)	Bandsnelheid (m/s)	Bandbreedte B (mm)	3-delige trog: β (°)
35	1,7	400	20°
75	1,7	500	25°
150	1,7	650	30°
225	1,7	800	30°
375	1,7	1000	30°
500	1,7	1200	30°

Bovenstaande waarden zijn geldig voor producten met een bulkdichtheid van 0,75 T/m³

